


## TECHNICAL INFORMATION

MARUU SECCHAKU

### 1 . ITEM

Laser Peach Strong Adhesion PET film

### 2 . CONSTRUCTION

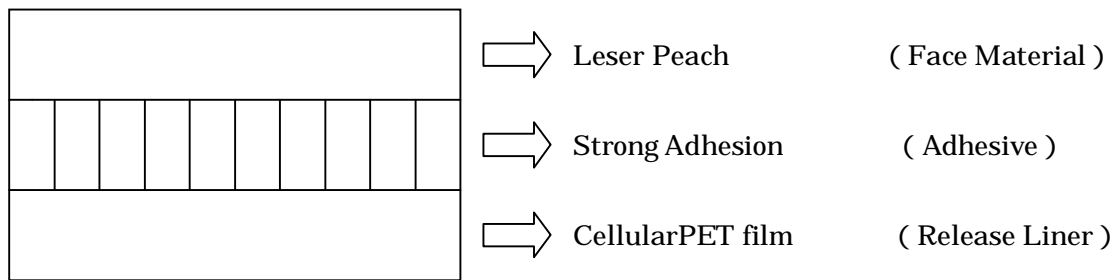

### 3 . MATERIALS

Face Material : Polyester White film

Adhesive : Acrylic type adhesive (Solvent type)

Release Liner : One side silicone coated polyester film

### 4 . TEST DETA

Properties	Item	Units	Results	Test Methods
Face Material	Thickness	$\mu\text{m}$	58	JIS-C-2318
	Tensile Strength	$\text{N}/\text{mm}^2$	More than 166	JIS-C-2318
Adhesive	Adhesion ( Stainless )	$\text{N}/25\text{mm}$	14.7	MARUU Method
	Holding Power	Sec.	NC 40000	
Release Liner	Thickness	$\mu\text{m}$	50	JIS-C-2318
	Weight	$\text{g}/\text{m}^2$	55	JIS-C-2318
	Tensile Strength	$\text{N}/\text{mm}^2$	More than 108	JIS-C-2318