


TECHNICAL INFORMATION

MARUU SECCHAKU

1 . ITEM

ST Coated PET#50 Strong Adhesion PGS

2 . CONSTRUCTION

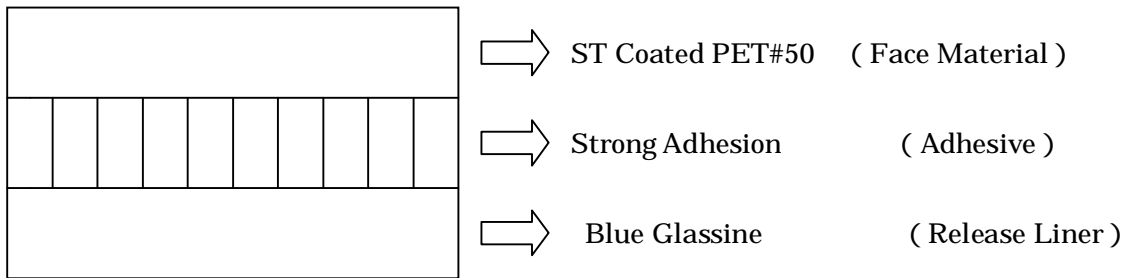

3 . MATERIALS

Face Material : ST coated Polyester film

Adhesive : Acrylic type adhesive (Solvent type)

Release Liner : Blue Glassine one side is polyethylene laminated and silicone coated.

4 . TEST DETA

Properties	Item	Units	Results	Test Methods	
Face Material	Thickness	μm	53	JIS-C-2318	
	Tensile Strength	N/mm^2	More than 166	JIS-C-2318	
Adhesive	Adhesion (Stainless)	$\text{N}/25\text{mm}$	11.7	MARUU Method	
	Holding Power	Sec.	NC 40000		
Release Liner	Thickness	μm	90	JIS-P-8118	
	Weight	g/m^2	94	JIS-P-8124	
	Tensile Strength	MD	$\text{N}/15\text{mm}$	More than 83	JIS-P-8113
		CD		More than 78	