


## TECHNICAL INFORMATION

MARUU SECCHAKU

### 1 . ITEM

KOUTEIYOU F#75    10   CLEARFILM

### 2 . CONSTRUCTION

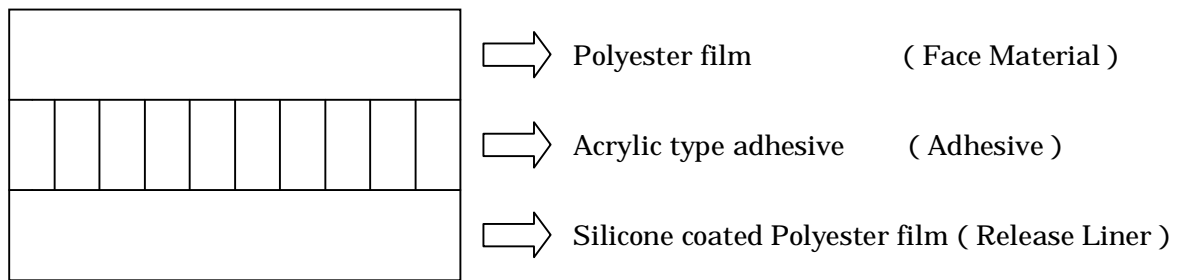

### 3 . TEST DATA

| Properties    | Item             | Units                  | Results       | Test Methods |
|---------------|------------------|------------------------|---------------|--------------|
| Face Material | Thickness        | $\mu\text{m}$          | 75            | JIS-C-2318   |
|               | Tensile Strength | $\text{N}/\text{mm}^2$ | More than 166 | JIS-C-2318   |
| Adhesive      | Adhesion ( PET ) | $\text{N}/25\text{mm}$ | 0.11          | MARUU Method |
|               | Holding Power    | Sec.                   | NC 40000      |              |
| Release Liner | Thickness        | $\mu\text{m}$          | 25            | JIS-C-2318   |
|               | Weight           | $\text{g}/\text{m}^2$  | 35            | JIS-C-2318   |
|               | Tensile Strength | $\text{N}/\text{mm}^2$ | More than 166 | JIS-C-2318   |