


## TECHNICAL INFORMATION

MARUU SECCHAKU

### 1 . ITEM

White Coated PET#50 Strong Adhesion PGS

### 2 . CONSTRUCTION

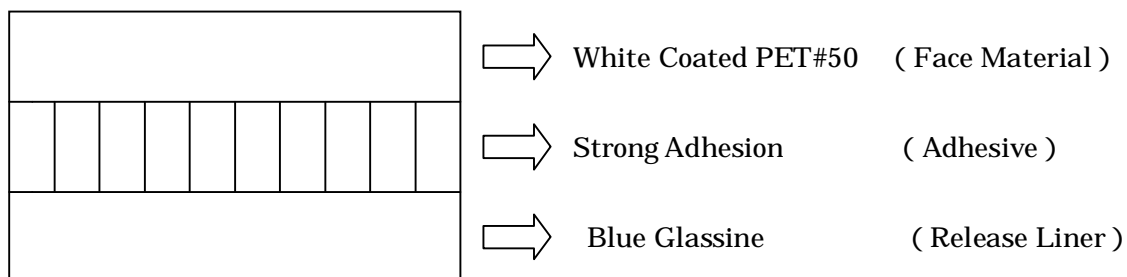

### 3 . MATERIALS

Face Material : White coated Polyester film

Adhesive : Acrylic type adhesive (Solvent type)

Release Liner : Blue Glassine one side is polyethylene laminated and silicone coated.

### 4 . TEST DATA

Properties	Item	Units	Results	Test Methods
Face Material	Thickness	μ m	53	JIS-C-2318
	Tensile Strength	N/mm <sup>2</sup>	More than 166	JIS-C-2318
Adhesive	Adhesion ( Stainless )	N/25 mm	11.7	MARUU Method
	Holding Power	Sec.	NC 40000	
Release Liner	Thickness	μ m	90	JIS-P-8118
	Weight	g/m <sup>2</sup>	94	JIS-P-8124
	Tensile Strength	MD	N/15mm	More than 83
CD		More than 78		