


## TECHNICAL INFORMATION

MARUU SECCHAKU

### 1 . ITEM

Siliconelami Standard Adhesion White Glassine

### 2 . CONSTRUCTION

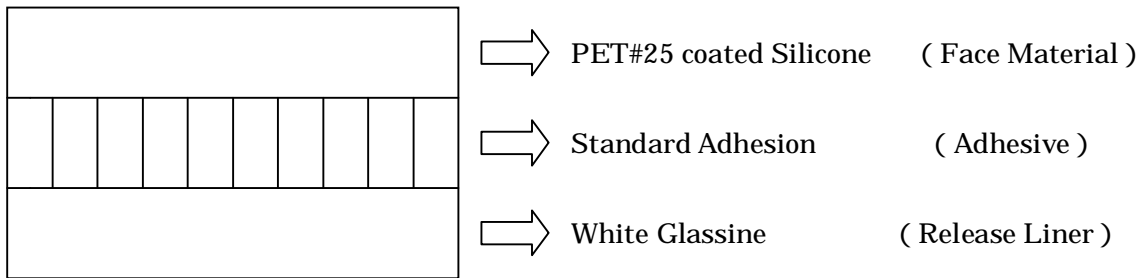

### 3 . MATERIALS

Face Material : Polyester Clear film (Faceside coated Silicone)

Adhesive : Acrylic type adhesive (Solvent type)

Release Liner : White Glassine one side is polyethylene laminated and silicone coated.

### 4 . TEST DETA

Properties	Item	Units	Results	Test Methods	
Face Material	Thickness	$\mu\text{m}$	25	JIS-C-2318	
	Tensile Strength	$\text{N}/\text{mm}^2$	More than 166	JIS-C-2318	
Adhesive	Adhesion ( Stainless )	$\text{N}/25\text{mm}$	5.4	MARUU Method	
	Holding Power	Sec.	NC 40000		
Release Liner	Thickness	$\mu\text{m}$	86	JIS-P-8118	
	Weight	$\text{g}/\text{m}^2$	87	JIS-P-8124	
	Tensile Strength	MD	$\text{N}/15\text{mm}$	More than 98	JIS-P-8113
		CD		More than 68	