


TECHNICAL INFORMATION

MARUU SECCHAKU

1 . ITEM

Woodfreepaper64 Rt-K GS

2 . CONSTRUCTION

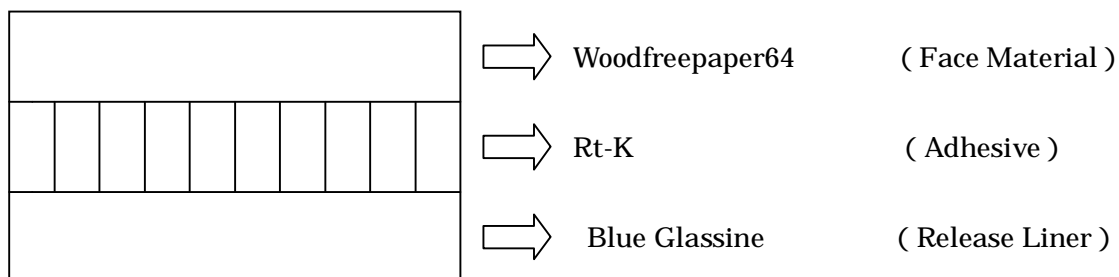

3 . MATERIALS

Face Material : Woodfreepaper White (64g/m²)

Adhesive : Acrylic type adhesive (Emulsion type) (Removable Adhesion)

Release Liner : Blue Glassine one side is silicone coated.

4 . TEST DETA

Properties	Item	Units	Results	Test Methods	
Face Material	Thickness	μ m	80	JIS-P-8118	
	Tensile Strength	N/15mm	More than 58.0	JIS-P-8113	
Adhesive	Adhesion (Stainless)	N/25mm	4.4	MARUU Method	
	Holding Power	Sec.	NC 40000		
Release Liner	Thickness	μ m	68	JIS-P-8118	
	Weight	g/m ²	75	JIS-P-8124	
	Tensile Strength	MD	N/15mm	More than 98.0	JIS-P-8113
		CD		More than 68.0	