


# Product Specification

Maruu secchaku Corporation  
Engineering Department

## 1. Product Name

PET#25 Strongadhesion PGS

## 2. Product Composition

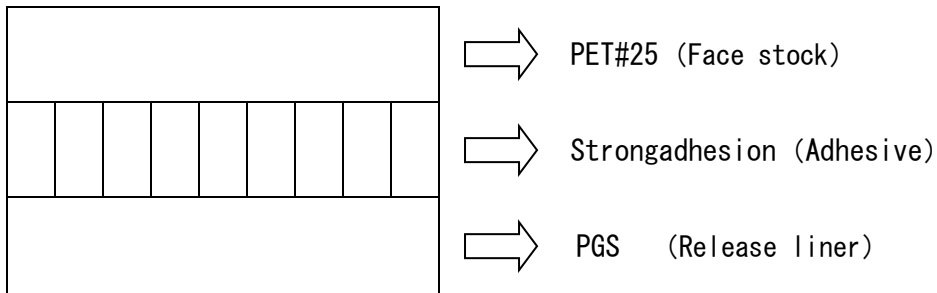

## 3. Material

Face Stock . . . . . PET# 25

Adhesive . . . . . Acrylic ester co-polymer (solvent type)

Release liner . . . . . Laminate polyethylene on both sides of the kraft paper, A silicone treatment on top.

## 4. Physical Property Standard

Category	Item	Unit	Criterion Value	Test method
Face stock	Thickness	$\mu m$	25	JIS-C-2318
	Tensile strength	$N/mm^2$	166over	JIS-C-2318
Adhesive	Adhesive force (Against SUS)	$mN/25mm$	9800	Maruu method
	Holding Power	sec	NC 40000	Maruu method
Release liner	Thickness	$\mu m$	90	JIS-P-8118
	Basis weight	$g/m^2$	94	JIS-P-8124
	Tensile strength	MD CD $N/15mm$	83over 78over	JIS-P-8113