


## TECHNICAL INFORMATION

MARUU SECCHAKU

### 1 . ITEM

Silver Bright#50 Strong Adhesion PGS

### 2 . CONSTRUCTION

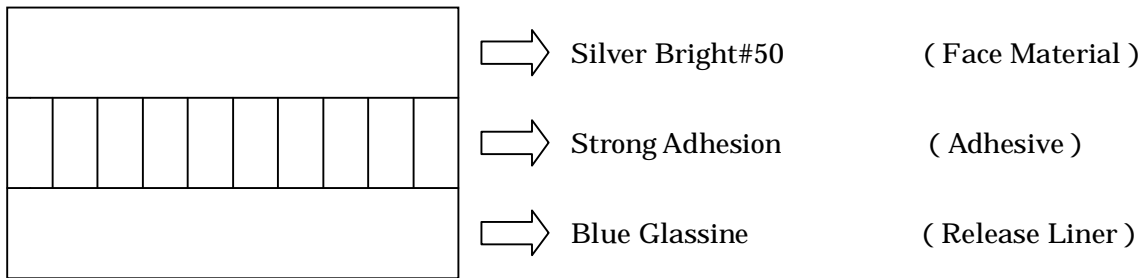

### 3 . MATERIALS

Face Material : Polyester Silver Bright film

Adhesive : Acrylic type adhesive (Solvent type)

Release Liner : Blue Glassine one side is polyethylene laminated and silicone coated.

### 4 . TEST DATA

| Properties    | Item                   | Units                  | Results                | Test Methods                 |
|---------------|------------------------|------------------------|------------------------|------------------------------|
| Face Material | Thickness              | $\mu\text{m}$          | 50                     | JIS-C-2318                   |
|               | Tensile Strength       | $\text{N}/\text{mm}^2$ | More than 166          | JIS-C-2318                   |
| Adhesive      | Adhesion ( Stainless ) | $\text{N}/25\text{mm}$ | 11.7                   | MARUU Method                 |
|               | Holding Power          | Sec.                   | NC 40000               |                              |
| Release Liner | Thickness              | $\mu\text{m}$          | 90                     | JIS-P-8118                   |
|               | Weight                 | $\text{g}/\text{m}^2$  | 94                     | JIS-P-8124                   |
|               | Tensile Strength       | MD<br>CD               | $\text{N}/15\text{mm}$ | More than 83<br>More than 78 |