


# TECHNICAL INFORMATION

MARUU SECCHAKU

## 1 . ITEM

Art<73> Strong Adhesion GS

## 2 . CONSTRUCTION

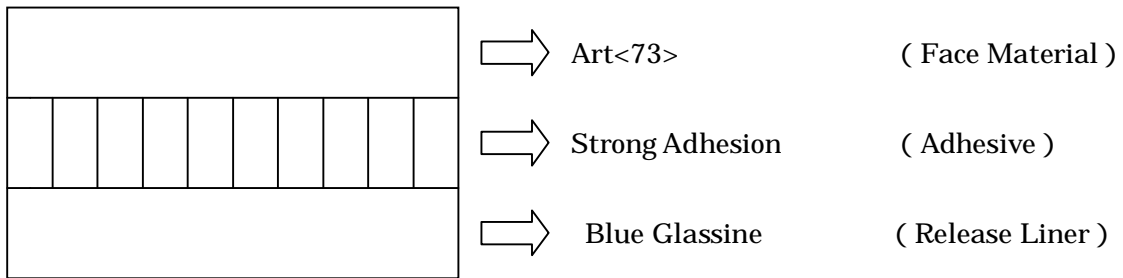

## 3 . MATERIALS

Face Material : Art Paper (85g/m<sup>2</sup>)

Adhesive : Acrylic type adhesive (Emulsion type)

Release Liner : Blue Glassine one side is silicone coated.

## 4 . TEST DATA

| Properties    | Item                   | Units            | Results        | Test Methods   |            |
|---------------|------------------------|------------------|----------------|----------------|------------|
| Face Material | Thickness              | μ m              | 72             | JIS-P-8118     |            |
|               | Tensile Strength       | N/15mm           | More than 49.0 | JIS-P-8113     |            |
| Adhesive      | Adhesion ( Stainless ) | N/25mm           | 19.6           | MARUU Method   |            |
|               | Holding Power          | Sec.             | NC 40000       |                |            |
| Release Liner | Thickness              | μ m              | 68             | JIS-P-8118     |            |
|               | Weight                 | g/m <sup>2</sup> | 75             | JIS-P-8124     |            |
|               | Tensile Strength       | MD               | N/15mm         | More than 98.0 | JIS-P-8113 |
|               |                        | CD               |                | More than 68.0 |            |