


## TECHNICAL INFORMATION

MARUU SECCHAKU

### 1 . ITEM

White Coated PET#100 Strong Adhesion Cream Kraft

### 2 . CONSTRUCTION

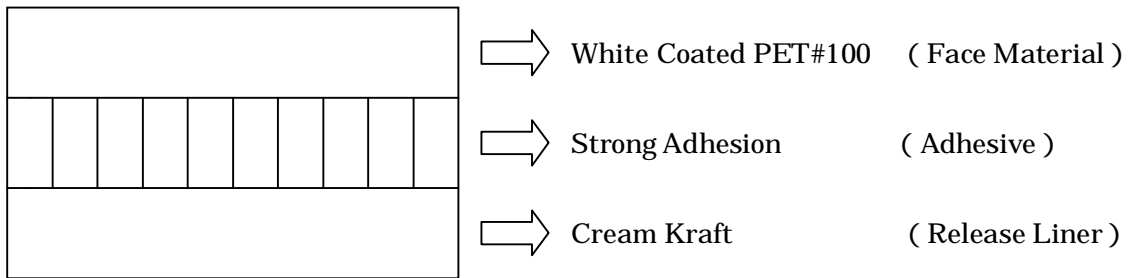

### 3 . MATERIALS

Face Material : White coated Polyester film

Adhesive : Acrylic type adhesive (Solvent type)

Release Liner : Kraft paper both side is polyethylene laminated and one side silicone coated.

### 4 . TEST DETA

| Properties    | Item                   | Units                  | Results                | Test Methods  |
|---------------|------------------------|------------------------|------------------------|---------------|
| Face Material | Thickness              | $\mu\text{m}$          | 103                    | JIS-C-2318    |
|               | Tensile Strength       | $\text{N}/\text{mm}^2$ | More than 166          | JIS-C-2318    |
| Adhesive      | Adhesion ( Stainless ) | $\text{N}/25\text{mm}$ | 9.8                    | MARUU Method  |
|               | Holding Power          | Sec.                   | NC 40000               |               |
| Release Liner | Thickness              | $\mu\text{m}$          | 165                    | JIS-P-8118    |
|               | Weight                 | $\text{g}/\text{m}^2$  | 145                    | JIS-P-8124    |
|               | Tensile Strength       | MD                     | $\text{N}/15\text{mm}$ | More than 137 |
| CD            |                        | More than 88           |                        |               |